


NSI-400V-92x40

92' x 40' (28 m x 12 m) Vertical Planar Near-field Measurement System

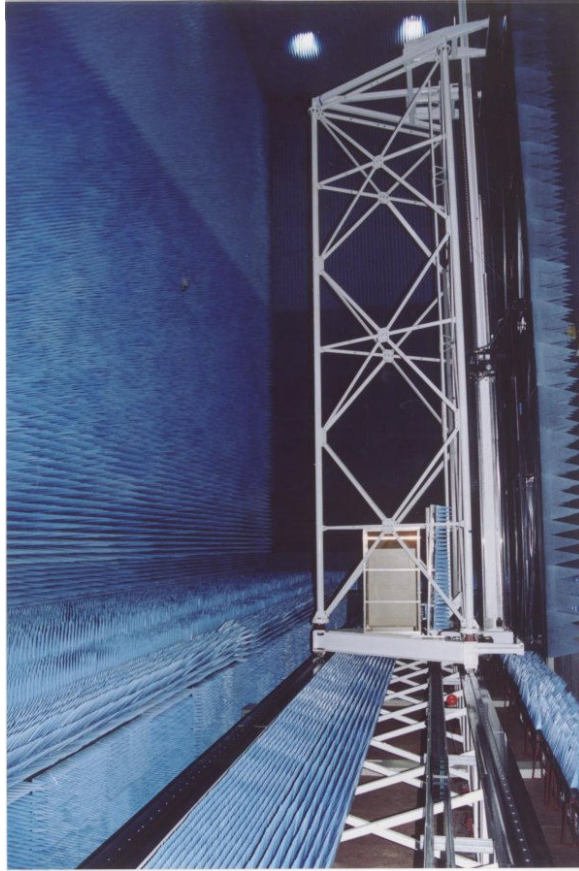

DESCRIPTION

The 400V-92x40 is an ideal system for measuring medium and high gain antennas (>15 dBi) with large apertures, making it suitable for testing large arrays or reflector antennas. The 400V-92x40 is based on an inverted "T" design and is constructed of steel. For high stability a cross-braced dual-rail steel I-beam base is used. This robust design is easy to maintain and align, and highly accurate. The high capacity probe carriage accommodates probes as low as WR1500 including optional roll and Z stages.

CAPABILITIES

The system interfaces with a wide variety of RF equipment and is capable of measuring amplitude and phase patterns from L-band to mmWave bands. The system includes NSI Antenna Measurement Software.


The system software runs on a Pentium based measurement workstation and provides automatic setup of scans based on measurement parameters and desired output. Measured data can be processed for far-field or holographic patterns yielding complete characterization of the antenna's performance. A single data set provides information on antenna gain, side lobe structure, beam pointing and cross polarization.

The system can be supplied with a variety of options and can be upgraded to allow for cylindrical or spherical measurements to expand system utility.

FEATURES

- High accuracy planarity <0.008" (0.20 mm) RMS
- 92' x 40' (28 m x 12 m) scan area
- Precision rack and pinion drive
- L-band to sub-mmWave band measurements
- Inverted "T" frame design for high accuracy
- Far-field, Near-field and Holographic patterns
- Cylindrical and Spherical options available

SPECIFICATIONS	
Construction	Inverted "T" Frame (steel)
Drive system	Precision Stepper Motor; Rack and Pinion Drive
Scan Area	92' x 40' (28 m x 12 m)
Planarity	<0.008" (0.20 mm) RMS
Corrected Planarity (Requires optional Structure Correction Software and Probe Translation Stage)	<0.003" (0.08 mm) RMS
Resolution (x,y)	x: 0.002" (0.05 mm) y: 0.002" (0.05 mm)
Position Repeatability	0.002" (0.05 mm) RMS
Scan Speed	x: 7.9 in/s (0.2 m/s) y: 10 in/s (0.25 m/s)
Probe Carriage Capacity	175 lbs (79.5 kg) maximum recommended; WR1500
System Controller	NSI controller with serial and parallel I/O interfaces
Measurement Workstation	Measurement workstation computer with large LCD monitor
Stepper Motor Power Amplifier	EIA 19" rack mount (7" high x 14" deep)
Motor Cables	Quick-connect; 40' (12 m); connectors on tower base
Scanner Absorber	Tower Absorber Kit (24" pyramidal cone)
Probe	WR90 Open-ended Waveguide Probe SMA (f) transition & Pyramidal absorber (3")
Probe Mount	Angle Bracket - allows mounting probe in "V" or "H" orientation
RF Cables	20 GHz RF Cables
Supported RF Devices	NSI Panther Receiver Subsystem or selection of Agilent, Rohde & Schwarz and Anritsu VNA's (contact NSI for a complete list)
Power	100-240 VAC switchable, 47-63 Hz, 800 watts

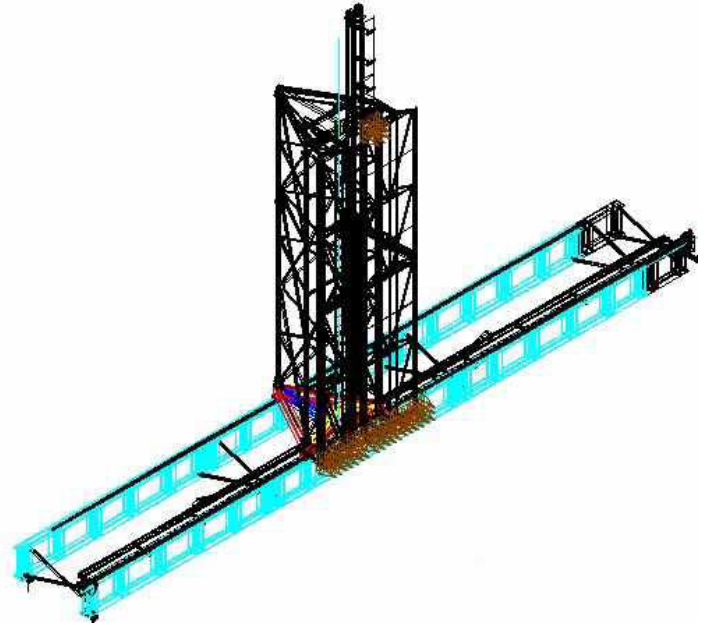

DIMENSIONS

- ◆ Width - 1266" (32.16 m)
- ◆ Depth - 221" (5.61 m)
- ◆ Height - 588" (14.94 m)
- ◆ System Weight - 85,200 lbs. (28,646 kg) approx

ORDERING INFORMATION

For additional options and information see Scanner Options and Accessories

Nearfield Systems, Incorporated

19730 Magellan Drive, Torrance, CA 90502, USA, Tel: 310.525.7000, Fax: 310.525.7100
Email: sales@nearfield.com. Visit our website: www.nearfield.com